

04-24-00 A

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

04/21/00

jc777 U.S. P

By this letter, I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on the below date of deposit.

Express Mail Label No.:	EL021376018US	Name of Person Making the Deposit:	PATRICK T. KING
Date of Deposit:	April 21, 2000	Signature of the Person Making the Deposit:	<i>Patrick T. King</i>

Patent Application

Navid Lashkarian

ATTORNEY DOCKET: Lashkarian 2

TITLE: CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATION OF OFDM SYSTEMS

BOX PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

Sir:

Enclosed are the following papers relating to the above-named application for patent:

Specification
3 Informal Sheets of Drawings
Declaration and Power of Attorney (Signed)

jc564 U.S. PTO
09/556858
04/21/00

CLAIMS AS FILED

Fee Items	Claims Filed	Included with Basic Fee	Extra Claims	Fee Rate	Total
Total Claims	13	- 20 =	0	x \$18.00	\$00.00
Independent Claims	5	- 3 =	2	x \$78.00	\$156.00
Assignment Recordation Fee				\$40.00	
Basic Filing Fee				\$690.00	\$690.00
Assignment Fee					\$00.00
Total Fee					\$846.00

04/21/00

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$846.00 to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

Please address all correspondence to: Patrick T. King; Law Offices of Patrick T. King; 3361 Aptos Rancho Road; Aptos CA 95003. Telephone calls should be directed to the undersigned at 831-685-6100.

Respectfully,

Patrick T. King

Patrick T. King
Reg. No 28,231
Attorney for Applicant

Date: April 21, 2000
Lucent Technologies Inc.
600 Mountain Avenue
P.O. Box 636
Murray Hill, NJ 07974-0636

CROSS-REFERENCE TO RELATED APPLICATION

5

10

1.

15

2.

20

the performance of these estimators, it is required to define a single number representing the goodness of the estimate. Assuming that all estimators are unbiased, i.e., expectation of the estimate is equal to the parameter, the variance of the estimator is used as a global measure for performance comparison of these estimators.

5 Cramer-Rao lower bound (CRLB) is a fundamental lower bound on the variance of the estimators and the unbiased estimator whose variance equals CRLB is called efficient. When the evaluation of efficient estimator is not possible, it is desirable to obtain an estimator in which its performance becomes as close as possible to the CRLB fundamental bound. The estimator which is closest in performance to the CRLB
10 estimator is known as a minimum variance unbiased (MVU) estimator.

Categorically, the previously proposed methods for synchronization of OFDM systems can be classified into two main subclasses, namely minimum mean square error (MMSE) and maximum likelihood (ML) estimators. In MMSE approach, the estimator uses the information provided by the reference signal (pilot tones) in order to minimize a
15 cost function associated with the synchronization parameters. A salient feature of this approach is that no probabilistic assumptions are made with regard to the data. Although MMSE estimators usually result in a tractable (globally stable) and easy to implement realization, no optimal criteria (probabilistic) is associated with these estimators. Also, since part of the transmitted information is allocated to the reference pilots, the
20 bandwidth efficiency of these methods is lower in comparison to the non-pilot schemes.

On the other hand, ML estimators provide the estimate of the unknown parameter subject to minimum probability of error criteria. Although not exactly efficient, ML estimators are asymptotically MVU, i.e., their variance attains that of MVU estimator as

the length of data record goes to infinity. However, due to the physical constraints, systems with infinitely long data records are not feasible for implementation purposes.

P.H. Moose, in "A Technique for Orthogonal Frequency Division Multiplexing Frequency Offset Correction," in IEEE Trans. On Communications, Vol. 42, No. 10, pp. 2908-2913, Oct. 1994, describes the use of a retransmission technique in order to reveal the frequency offset parameter in the likelihood function of the received signal. Due to the redundancy introduced by repeating the data block, the data rate efficiency is decreased by a factor of two. To avoid this imperfection, a ML estimator based on cyclic prefix (CP) is described by J. van de Beck, M. Sandel and P. O. Borjesson, in "ML Estimation of Timing and Frequency Offset in OFDM Systems," IEEE Trans. On Signal Processing, Vol. 45, No. 3, pp. 1800-1805, July 1997. In this approach, the side information provided by the CP is used to obtain the likelihood function for joint estimation of symbol timing error and frequency offset in an OFDM system.

The likelihood function described in the Moose reference does not globally characterize the observation vector over the entire range of the timing offset. Consequently, the ML estimator proposed based on this likelihood function would result in considerable performance loss over a finite range of timing offset interval.

Currently, there is increasing interest in multi-carrier modulation (MCM) for dividing a communication channel into several subchannels and transmitting many subcarriers through a single band using frequency division multiplexing (FDM) techniques. In the MCM method, however, because several subcarriers occupying a narrow frequency domain are transmitted at one time, a relatively longer symbol period results compared with a single carrier modulation method. The MCM method has, owing

to such characteristics, the advantages that equalization is easily performed and that it has immunity to impulse noise. OFDM is a type of the MCM designed to maximize the working frequency efficiency by securing orthogonality among the multiplexed subcarriers. OFDM is applied to mobile radio channels to attenuate multipath fading.

5 In an OFDM transmitting/receiving system, modulation and demodulation of parallel data are carried out using the Fast Fourier Transform (FFT). It is required that the sampled data be sent in predetermined frames, having passed through a FFT routine, been time-division multiplexed, and transmitted, then restored at the receiving end. However, if the synchronization is in error in the course of restoring the frame, the signals
10 demodulated after the FFT will be influenced by interchannel and intersymbol interference. Accordingly, the problem of synchronization in reforming the frame, especially any joint carrier frequency offset or symbol timing error, must be addressed as a matter of importance.

Conventional synchronization methods as above-described encounter problems in
15 that the process of synchronization is not only very complex, but the synchronization is not realized rapidly.

SUMMARY OF THE INVENTION

Motivated by the sub-optimum performance of estimators of the prior art, a likelihood function for joint estimation of carrier frequency offset and symbol timing
20 error of OFDM systems is disclosed in the related, copending application; and a new optimum ML joint estimator is disclosed therein. In order to reduce the variance of that ML estimator, a new class of MVU estimators for frequency offset estimation of PFDM systems is disclosed herein.

There is disclosed to exist but one function of sufficient statistic which provides the MVU estimate of the frequency offset. The estimator provided by the instant invention is a closed form expression; providing an estimator which is a function of data statistic. Consequently, it does not suffer from converging to multiple local minima, a problem which arises in ML technique with nonconvex loglikelihood functions.

The advantages of the instant MVU estimator over the class of previously proposed estimators are two; first, it is MVU, therefore its variance is minimum among the entire class of estimators which use the same probabilistic measure. Secondly, it provides a closed form expression for mapping the statistics into the estimation domain.

The former property assures optimality of the estimator, while the later facilitate the closed loop analysis of the system.

Accordingly, the present invention is directed at a synchronization method that substantially obviates on or more of the problems due to limitations and disadvantages of the prior art. To achieve these and other advantages, and in accordance with the purpose of the invention as embodied and broadly described, there is provided a method of estimating carrier frequency offset error in a received sample bit stream including an observation vector (OV), having an observed carrier frequency timing offset ϵ , and a plurality of data-symbol frames, having a symbol timing offset error ϑ . The method comprises the steps of generating a probability density function (PDF) based on the OV and generating from the PDF an estimate of carrier frequency offset error, $\epsilon_{MVU|\vartheta}$, being a minimum variance unbiased (MVU) estimator.

In another aspect of the invention, the OV comprises an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, and wherein the PDF

comprises a first term, p1, based on the timing offset ϑ being within the span 1 to N and a second term, p2, based on said timing offset ϑ being within the span N+1 to N+L. In yet another aspect of the invention the received bit stream has uncorrelated independent identically distributed random signal and noise sequence variables with power of σ_s^2 and σ_n^2 , respectively, wherein the OV is denoted \mathbf{x} , and wherein the MVU estimator $\varepsilon_{\text{MVU}|\vartheta}$ is the conditional expectation of a second moment estimator, said second moment estimator given by

$$\tilde{\varepsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\vartheta}^{\vartheta+L-1} x[k]x^*[k+N] \right\}$$

In another aspect of the invention the MVU estimator $\varepsilon_{\text{MVU}|\vartheta}$ is given by

$$\begin{aligned} 10 \quad \tilde{\varepsilon}_{\text{MVU}|\vartheta} &= E \left(\tilde{\varepsilon} \middle| T_1(\mathbf{x}, \vartheta) \right) = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\vartheta}^{\vartheta+L-1} x[k]x^*[k+N] \middle| T_1(\mathbf{x}, \vartheta) \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(\mathbf{x}, \vartheta)}{L\sigma_s^2} \right\} \end{aligned}$$

where \Im is the imaginary operator and where

$$T_1(\mathbf{x}, \vartheta) = \begin{cases} \sum_{k=\vartheta}^{\vartheta+L-1} x[k]x^*[k+N] & 1 \leq \vartheta \leq N \\ \sum_{k=0}^{\vartheta-N-1} x[k]x^*[k+N] + \sum_{k=\vartheta}^{N+L-1} x[k]x^*[k+N] & N+1 \leq \vartheta \leq N+L \end{cases}$$

The invention also provides a method of synchronizing a received sample bit stream, comprising the steps of transmitting at a transmitter the bit stream including an observation vector (OV), receiving and sampling at a receiver the bit stream, the sampled bit stream including, the OV with an observed carrier frequency offset ε , and a plurality of data-symbol frames, having a symbol timing offset error ϑ ; generating a probability

density function (PDF) based on the OV; generating from the PDF an estimate of carrier frequency offset error, $\varepsilon_{\text{MVU}}|_{\mathcal{G}}$, being a minimum variance unbiased (MVU) estimator; and synchronizing the received bit stream by the MVU estimate of carrier frequency offset.

Further aspects of the synchronization method of the invention include wherein the OV comprises an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, and wherein the PDF comprises a first term, p1, based on the observed timing offset \mathcal{G} being within the span 1 to N and a second term, p2, based on the observed timing offset \mathcal{G} being within the span N+1 to N+L. In yet another aspect of the invention, the synchronization method provides that the received bit stream has uncorrelated independent identically distributed random signal and noise sequence variables with power of σ_s^2 and σ_n^2 , respectively, wherein the OV is denoted x , and wherein the MVU estimator $\varepsilon_{\text{MVU}}|_{\mathcal{G}}$ is the conditional expectation of a second moment estimator, the second moment estimator given by

$$\tilde{\varepsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \right\}$$

Further aspect of the invention, the synchronization method wherein said MVU estimator $\varepsilon_{\text{MVU}}|_{\mathcal{G}}$ is given by

$$\begin{aligned} \tilde{\varepsilon}_{\text{MVU}}|_{\mathcal{G}} &= E \left(\tilde{\varepsilon} \middle| T_1(x, \mathcal{G}) \right) = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \middle| T_1(x, \mathcal{G}) \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(x, \mathcal{G})}{L\sigma_s^2} \right\} \end{aligned}$$

where \Im is the imaginary operator and where

$$T_1(x, \vartheta) = \begin{cases} \sum_{k=\vartheta}^{L+\vartheta-1} x[k]x^*[k+N] & 1 \leq \vartheta \leq N \\ \sum_{k=0}^{\vartheta-N-1} x[k]x^*[k+N] + \sum_{k=\vartheta}^{N+L-1} x[k]x^*[k+N] & N+1 \leq \vartheta \leq N+L \end{cases}$$

In another aspect of the invention, A method of estimating carrier frequency offset error is provided for a received sample bit stream including an observation vector (OV), having an observed carrier frequency timing offset ϵ , and a plurality of data-
 5 symbol frames, the OV comprising an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, comprising the steps of generating the expected value of the autocorrelation of the k th entry of the OV; and generating from the expected value an estimate of carrier frequency offset error, ϵ_{mom} , being a moment estimator.

In yet another aspect of the invention, the moment carrier frequency offset error
 10 estimation method further includes wherein the OV is denoted \mathbf{x} , and wherein the moment estimator ϵ_{mom} is given by $\hat{\epsilon}_{\text{mom}} = \frac{\Im}{2\pi} \{\ln T_3(\mathbf{x})\}$
 where the statistic $T_3(\mathbf{x})$ is defined as

$$T_3(\mathbf{x}) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N].$$

A method of synchronizing a received sample bit stream, is also provided by the
 15 invention comprising the steps of: transmitting at a transmitter said bit stream including an observation vector (OV); receiving and sampling at a receiver said bit stream, said sampled bit stream including, said OV with an observed carrier frequency offset ϵ , and a plurality of data-symbol frames, having a symbol timing offset error ϑ ;

generating the expected value of the autocorrelation of the k th entry of the OV;
 generating from the expected value an estimate of carrier frequency offset error, ϵ_{mom} ,
 being a moment estimator; and synchronizing the received bit stream by the moment
 estimate of carrier frequency offset.

5 Further aspect of the invention provides a synchronization method wherein the
 OV is denoted \mathbf{x} , and wherein the moment estimator ϵ_{mom} is given by

$$\hat{\epsilon}_{\text{mom}} = \frac{\Im}{2\pi} \left\{ \ln T_3(\mathbf{x}) \right\}$$

where the statistic $T_3(\mathbf{x})$ is defined as

$$T_3(\mathbf{x}) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N].$$

10 In yet another aspect of the invention, a method of estimating carrier frequency
 offset error in a received sample bit stream including an observation vector (OV), having
 an observed carrier frequency timing offset ϵ , and a plurality of data-symbol frames, the
 OV comprising an L-bit cyclic extension portion and a first and a second N-bit
 synchronization frame, comprising the steps of: selecting one estimator method from a
 15 group of three: a maximum likelihood (ML) estimator, a minimum variance unbiased
 (MVU) estimator, a moment estimator, based on said OV; and generating from the
 selected estimator an estimate of carrier frequency offset error.

Additional features and advantages of the invention will be set forth in the
 description which follows, and in part will be apparent from the description, or may be
 20 learned by practice of the invention. The objectives and other advantages of the invention
 will be realized and attained by the methods particularly pointed out in the written
 description and claims hereof, as well as the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a signal flow block diagram depicting the frequency recovery loop for
 5 estimation of frequency offset.

FIG. 2 is a block diagram depiction of the ML estimator disclosed in the cross-
 referenced, copending application and the MVU and moment estimators of the instant
 invention.

FIG. 3 is a graph comparing the computer simulations of the prior art ML
 10 frequency offset estimation and the ML frequency offset estimation disclosed in the
 related, copending application.

FIG. 4 is a graph comparing the computer simulations of the MVU frequency
 offset estimator of the instant invention with that of the CRLB estimator.

FIG. 5 graphically depicts the closed loop performance of the MVU estimator of
 15 the instant invention by comparing the frequency offset estimate of the closed loop MVU
 estimator against an analytical derivation thereof.

DETAILED DESCRIPTION OF THE INVENTION

The cross-referenced co-pending application entitled "Globally Optimum
 Maximum Likelihood Estimation of Joint Carrier Frequency Offset and Symbol Timing
 20 Error," U.S. Ser. No. 09/496,890, filed on March 2, 2000, incorporated herein by
 reference, discloses a probability density function (PDF), p , which globally characterizes
 an observation vector x according to the equation

$$p(x, \varepsilon, \vartheta) = p_1(x, \varepsilon, \vartheta)(U[\vartheta - 1] - U[\vartheta - N - 1]) + p_2(x, \varepsilon, \vartheta)(U[\vartheta - N - 1] - U[\vartheta - N - L + 1]) \quad (14)$$

where ε and ϑ are the frequency offset and symbol timing error introduced by the synchronization mismatch in the carrier frequency and symbol timing, respectively. And p_1 and p_2 are probability density functions derived and described in the related copending application.

5 Further derived and described therein are the statistics T_1 and T_2

$$T_1(x, \vartheta) = \begin{cases} \sum_{k=\vartheta}^{L+\vartheta-1} x[k]x^*[k+N] & 1 \leq \vartheta \leq N \\ \sum_{k=0}^{\vartheta-N-1} x[k]x^*[k+N] + \sum_{k=\vartheta}^{N+L-1} x[k]x^*[k+N] & N+1 \leq \vartheta \leq N+L \end{cases} \quad (15)$$

and

$$T_2(x, \vartheta) = \begin{cases} \sum_{k=\vartheta}^{L+\vartheta-1} |x[k]|^2 + |x[k+N]|^2 & 1 \leq \vartheta \leq N \\ \sum_{k=0}^{\vartheta-N-1} |x[k]|^2 + |x[k+N]|^2 + \sum_{k=\vartheta}^{N+L-1} |x[k]|^2 + |x[k+N]|^2 & N+1 \leq \vartheta \leq N+L \end{cases} \quad (16)$$

10 N and L being the number of samples per frame and the number of cyclically-extended samples appended at the beginning of each frame, respectively, all as further described in the related, copending application.

The MVU estimator of the instant invention is derived by resorting to the theory

of sufficient statistics. The first step in deriving the MVU estimator is to obtain the

15 sufficient statistic for the PDF given in (14). The sufficient statistic is known to be a

function of the observation vector, namely $T(\mathbf{x})$, such that the conditional PDF of the

observation vector given $T(\mathbf{x})$ does not depend on the unknown estimation parameters

$[\varepsilon, \vartheta]$. Evaluating the sufficient statistic is a formidable task for the broad class of PDFs,

however the Neyman-Fisher Factorization theorem can be used for identifying the

20 potential sufficient statistics. According to this theorem, if the PDF can be factored in the

form $g(T(\mathbf{x}), \varepsilon, \vartheta)h(\mathbf{x})$ where g is a function depending on \mathbf{x} only through $T(\mathbf{x})$ and $h(\mathbf{x})$ is a function depending only on \mathbf{x} , then $T(\mathbf{x})$ is a sufficient statistic for estimation of the parameters ε and ϑ . By reformulating the PDF given in 14 to

$$p(\mathbf{x}, \varepsilon, \vartheta) = e^{\frac{2\Re[e^{j2\pi\varepsilon}T_1(\mathbf{x}, \vartheta)|a|] - |a|^2 T_2(\mathbf{x}, \vartheta)}{2(1-|a|^2)(\sigma_s^2 + \sigma_n^2)}} h_1(\mathbf{x})$$

5 there is a direct dependency between the parameter ϑ and the statistics $T_1(\mathbf{x}, \vartheta)$ and $T_2(\mathbf{x}, \vartheta)$. Based on this observation, the Neyman-Fisher theorem fails to provide a sufficient statistic for estimation of ϑ , we can factor the PDF into

$$p(\mathbf{x}, \varepsilon | \vartheta) = e^{\frac{\Re[e^{j2\pi\varepsilon}T_1(\mathbf{x}, \vartheta)|a|]}{(1-|a|^2)(\sigma_s^2 + \sigma_n^2)}} h_2(\mathbf{x}) \quad (17)$$

Clearly then, $T_1(\mathbf{x}, \vartheta)$ forms a sufficient statistic for estimation of the parameter ε .

10 Next, application of the Rao-Blackwell-Lehmann-Scheffe (RBLs) theorem is used to find the MVU estimator. According to this theorem, if $\tilde{\varepsilon}$ is an unbiased estimator of ε and $T(\mathbf{x})$ is a sufficient complete statistic for ε then $\hat{\varepsilon} = E(\tilde{\varepsilon} | T(\mathbf{x}))$ is a valid, unbiased, MVU estimator of ε .

In applying the above theorem, we need to obtain an unbiased estimator of
15 ε , termed $\hat{\varepsilon}$, and determine the conditional expectation of this estimator given the statistic $T_1(\mathbf{x}, \vartheta)$. An appropriate candidate for the unbiased estimator of ε can be obtained from the statistical moments of the random vector \mathbf{x} . The autocorrelation function of the observation vector \mathbf{x} , E , yields that the second moment of the random variable $x[k]$ with $k \in \Omega$, satisfies the following identity

$$E\{x[k]x^*[k+N]\} = \sigma_s^2 e^{-j2\pi\epsilon} \quad (18)$$

Having this observation, one uses the second moment estimator as an unbiased estimator for ϵ as given by

$$\tilde{\epsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \right\} \quad (19)$$

5 where \Im is the imaginary operator. In deriving the above estimator, $E(x[k]x^*[k+N])$ was replaced by its natural estimator $\frac{1}{L} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N]$. It is straightforward to verify that this estimator is unbiased as it satisfies the condition

$$E\{\tilde{\epsilon}\} = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \right\} = \epsilon \quad (20)$$

Next, one obtains the conditional expectation of $\hat{\epsilon}$ given the sufficient statistic $T_{1(x,\mathcal{G})}$ as

10 follows

$$\begin{aligned} \tilde{\epsilon} \text{ MVU} | \mathcal{G} &= E \left(\tilde{\epsilon} \middle| T_{1(x,\mathcal{G})} \right) = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \middle| T_{1(x,\mathcal{G})} \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(x,\mathcal{G})}{L\sigma_s^2} \right\} \end{aligned} \quad (21)$$

It is important to emphasize that since the underlying PDF given in (14) belongs to the exponential family of PDFs, then the sufficient statistics $T_1(x,\mathcal{G})$ forms a complete
 15 statistic for estimation of the parameter ϵ . Therefore, the mapping function obtained from applying RBLs theorem, namely $\ln T(x,\mathcal{G})$, is but one function of the statistic $T_1(x,\mathcal{G})$ and no other estimator with the same statistic can result in a lower variance with respect to MVU estimator.

A. Cramer-Rao Lower Bound

It is known that under broad conditions, the variance of any unbiased estimator of a nonrandom parameter ε satisfies the CRLB as

$$\text{var}(\tilde{\varepsilon}_{MVU|\mathcal{G}}) \geq \frac{1}{I(\varepsilon)} \quad (22)$$

5 where $I(\varepsilon)$ is the Fisher Information given by

$$I(\varepsilon) = -E \left[\frac{\partial^2 \ln pr(\mathbf{x}, \varepsilon | \mathcal{G})}{\partial \varepsilon^2} \right] \quad (23)$$

Substituting (17) into (23), after some algebraic manipulations, the CRLB of the MVU estimator becomes

$$\text{var}(\tilde{\varepsilon}_{MVU|\mathcal{G}}) = \frac{(1 - |a|^2)(\sigma_s^2 + \sigma_n^2)}{(2\pi)^2 |a| E\{T_1(\mathbf{x}, \mathcal{G})\}} = \frac{\left(1 + \frac{1}{\text{SNR}}\right)^2 - 1}{(2\pi)^2 L} \quad (24)$$

10 where $\text{SNR} \triangleq \frac{\sigma_s^2}{\sigma_n^2}$ is the signal to noise ratio at the receiving end.

B. Closed Loop Performance

FIG. 1 is a signal flow block diagram depicting the frequency recovery loop for estimation of frequency offset according to the instant invention. A closed loop system is obtained by feeding back the information obtained from the estimator into a sampler block (bootstrap). A sampler 10 updates its frequency at the beginning of each observation vector (every $(N+L)$ samples). The sampler 10 receives the latest signal and produces the sampled symbol stream $\mathbf{x}[k]$ therefrom which is conducted to a block 12 and a block 14 performing the autocorrelation operation on the observation vector as required by equation (19). The result of the autocorrelation operation is conducted to a moving

average (MA) filter block 16 and therefrom to a block 18 performing the natural logarithm function and thence to a block 20 performing the imaginary operation function, as required by equation (19). To match the various sampling frequencies used in the system, a down sampler (decimator) block 22 is used prior to return to the sampler 10 to produce the minimum variance unbiased estimator, $\hat{\varepsilon}[m]$. Finally, a gain block (G) 24 is used to control the closed loop characteristic of the system (stability, settling time, noise sensitivity).

According to Fig. 1, the frequency offset for the m th observation vector can be expressed as

$$\begin{aligned} \hat{\varepsilon}[m] &= \frac{1}{2\pi} \ln \frac{1}{L\sigma_s^2} \sum_{i=0}^{L-1} x_{(m-1)}[i] e^{-j \frac{2\pi \hat{\varepsilon}[m-1](\vartheta+i)}{N} G} x_{(m-2)}^*[i] e^{j \frac{2\pi \hat{\varepsilon}[m-2](\vartheta+i)}{N} G} \\ &= \frac{1}{2\pi} \ln \frac{1}{L\sigma_s^2} e^{j \frac{2\pi \Delta \hat{\varepsilon}[m-1](\vartheta)}{N}} \sum_{i=0}^{L-1} x_{(m-1)}[i] x_{(m-2)}^*[i] e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1](i)}{N}} \end{aligned} \quad (25)$$

where $\Delta \hat{\varepsilon}[m-1] \triangleq (\varepsilon[m-1] - \varepsilon)[m-2]G$ and $x_m[i] \triangleq x[m(N+L)+\vartheta+i]$. The term inside the sum is a stochastic quantity and does not have a closed form expression. However, for reasonably high signal to noise ratio it can be well approximated by its expected value

$(E[x_{(m-1)}[i] x_{(m-2)}^*[i]] = \sigma_s^2)$. Therefore, the expression inside the sum can be written as

$$\begin{aligned} \sum_{i=0}^{L-1} e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1](i)}{N}} &= \frac{1 - e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1]L}{N}}}{1 - e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1]}{N}}} = e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1](L-1)}{2N}} \frac{\sin\left(\frac{\Delta \hat{\varepsilon}[m-1]L}{2N}\right)}{\sin\left(\frac{\Delta \hat{\varepsilon}[m-1]}{2N}\right)} \\ \Delta \hat{\varepsilon}[m-1] &\rightarrow 0 \quad e^{-j \frac{2\pi \Delta \hat{\varepsilon}[m-1](L-1)}{2N}} \end{aligned} \quad (26)$$

Substituting (26) into (25), after some algebraic manipulations, the frequency offset of m 'th observation vector becomes

$$\hat{\varepsilon}[m] = -(\hat{\varepsilon}[m-1] - \hat{\varepsilon}[m-2]) \frac{G}{N} \left(\vartheta + \frac{L-1}{2} \right) \quad (27)$$

The above equation represents a second order finite difference system in which its

dynamic can be obtained from solving the following equation

$$\hat{\varepsilon}[m] + \beta \hat{\varepsilon}[m-1] - \beta \hat{\varepsilon}[m-2] = 0$$

where $\beta \triangleq \frac{G}{N} \left(\vartheta + \frac{L-1}{2} \right)$. Clearly, the solution to the above finite difference equation is the form of

$$\hat{\varepsilon}[m] = c_1 (z_1)^m + c_2 (z_2)^m \quad (28)$$

where $z_{1,2} \triangleq \frac{-\beta \pm \sqrt{\beta^2 + 4\beta}}{2}$ are two dynamical modes of the system. The smaller root (negative) results in a high frequency oscillation in the frequency offset estimate.

However, as is shown in a computer simulation, infra, this term is filtered out by the moving average filter. To assure stability, the gain block should be set such that both poles lie inside the unit circle.

$$\left| \beta_{\max} + \sqrt{\beta^2_{\max} + 4\beta_{\max}} \right| \leq 2 \quad (29)$$

where

$$\beta_{\max} \triangleq \max_{\vartheta} \frac{G}{N} \left(\vartheta + \frac{L-1}{2} \right) = \frac{G}{N} \left(N + L + \frac{L-1}{2} \right) \quad (30)$$

It is known that when the timing offset parameter is not known to the receiver or

if the noise PDF differs from Gaussian distribution, finding the optimum estimator (ML,

MVU, CRLB) may not be an easy task. However there exists a moment estimator which provides a consistent estimate for estimation of frequency offset regardless of noise distribution and timing offset values. Although there is no optimum criterion associated with the moment estimator due to its simple structure, it is frequently used as an initial estimate for other estimators such as ML estimator. Consider a sequence of first $N+L$ samples of vector \mathbf{x} . Using the autocorrelation of k th entry of this vector satisfies the following identity Moment Estimator

$$r_{xx}[N] = \begin{cases} \sigma_s^2 e^{-j2\pi\epsilon} & k \in \Omega \\ 0 & k \notin \Omega \end{cases} \quad (31)$$

Using Base Rule, the expected value of the above function (with respect to parameter k) can be expressed as

$$E_k[r_{xx}[N]] = \sigma_s^2 \exp(-j2\pi\epsilon) \text{ pr}(k \in \Omega) + 0 \text{ pr}(k \notin \Omega) = \frac{L}{L+N} \sigma_s^2 \exp(-j2\pi\epsilon) \quad (32)$$

Substituting the N th autocorrelation lag with its natural estimator, the moment estimator for frequency offset under uncertain timing offset can be found as

$$\hat{\epsilon}_{mom} = \frac{\Im}{2\pi} \{\ln T_3(x)\} \quad (33)$$

where the statistic $T_3(x)$ is defined as

$$T_3(x) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N] \quad (34)$$

Statistical assessment of moment estimator is a formidable task over entire range of SNR. However, for relatively high SNR, the random observation vector is heavily concentrated about its mean. Using the statistical linearization, and a first-order Taylor expression of

the estimator about its mean to obtain the variance of estimate. In doing so, one substitutes for the random variable \mathbf{x} in (34) and obtains

$$T_3([\mathbf{x}]) = f([\mathbf{s}, \mathbf{w}]) = \frac{\mathfrak{I}}{\ln} \left\{ L \sigma_s^2 \sum_{k=0}^{N+L-1} (s[k-\mathcal{G}] \exp^{j \frac{2\pi k \varepsilon}{N}} + w[k]) \left(s^*[k-\mathcal{G}+N] \exp^{-j \frac{2\pi(k+N)\varepsilon}{N}} + w^*[k+N] \right) \right\} \quad (35)$$

5 where the signal (\mathbf{s}) and noise (\mathbf{w}) vector are defined as

$$\begin{aligned} \mathbf{s} &\triangleq [s[0]] \cdots [s[N+L-1]] \\ \mathbf{w} &\triangleq [w[0]] \cdots [w[N+L-1]] \end{aligned} \quad (36,37)$$

By virtue of the above equation, the expected value of observation vector for a fixed realization of signal vector \mathbf{s} would be $E[\varepsilon_{mom}] = f(\mathbf{s})$. Then performing a first order Taylor expansion of $f([\mathbf{s}, \mathbf{w}])$ about the point $E_{w[\mathbf{x}]}$ yields

$$10 \quad \hat{\varepsilon}_{mom} = f([\mathbf{s}, 0]) + \nabla_w f([\mathbf{s}, 0])^* \mathbf{w} = f(\mathbf{s}, 0) + \sum_{n=0}^{L+N-1} \frac{\partial f([\mathbf{s}, \mathbf{w}])}{\partial w[n]} \Big|_{(\mathbf{w}=0)} w[n] \quad (38)$$

Taking the derivative of (35) with respect to $w[n]$ and setting $\mathbf{w}=0$, results in

$$\frac{\partial h}{\partial w[n]} \Big|_{\mathbf{w}=0} = \frac{1}{2\pi} \left(\sum_{i=0}^{N+L-1} s[i-\mathcal{G}] s^*[i-\mathcal{G}+N] e^{-j2\pi\varepsilon} \right)^{-1} s^*[n+N-\mathcal{G}] e^{\frac{2\pi\varepsilon(n+N)}{N}}$$

The second term in (38) represents the contribution of noise in the estimate.

Knowing that noise samples are iid with power of σ_w^2 , the variance of estimate can be

15 obtained from

$$\text{var}(\varepsilon) \cong \frac{\sum_{n=0}^{L+N-1} |s[n+N-\mathcal{G}]|^2 \sigma_w^2}{\left(2\pi \sum_{i=0}^{N+L-1} s[i-\mathcal{G}] s^*[i-\mathcal{G}+N] \right)^2} \quad (39)$$

For sufficiently large block lengths (N), the above term can be well approximated as

$$\text{var}(\varepsilon) \cong \frac{(N+L)\sigma_s^2\sigma_w^2}{(2\pi L\sigma_s^2)^2} = \frac{(N+L)}{(2\pi L)^2 \text{SNR}} \quad (40)$$

The resemblance between the estimators of equations (21) and (33) reveals a unified structure which characterizes the ML, MVU and moment estimators which can be classified into a single unified structure. This provides a unique framework for analysis of the proposed estimators. Moreover, it allows an investigation of the effect of symbol timing error in the estimation of carrier offset for each individual estimator. Comparing the MVU estimator given in (21) to the moment estimator in (33) reveals some similarities in the structure of the estimators. Clearly, both moment and MVU estimators use the same mapping function, namely the log function, to project the data statistics into the estimation domain. The only difference is in the form of statistics used for each scheme.

FIG. 2 is a block diagram depiction of the ML estimator disclosed in the cross-referenced, copending application and the MVU and moment estimators of the instant invention. An autocorrelation operation on the observation vector $x[k]$ is performed by blocks 30 and 34; as shown in FIG. 2, both estimators of the instant invention obtain the statistic by correlating the samples with the N th delayed samples. This operation is performed by using a moving average (MA) filter (shown as a block 36) in the structure of estimators. However, the MVU and moment estimators use different upper and lower bound for the MA filter. In the moment estimator, the averaging is performed over the first $N+L$ samples of the observation vector. This would remove the requirement of knowing the exact timing offset parameter in estimation of carrier frequency offset.

However, the estimate obtained from using this estimator results in a less accurate estimate (more variance) in comparison to MVU estimate. On the other hand, the MVU estimator requires the knowledge of symbol timing in the estimation of carrier frequency offset, as shown in FIG. 2 by a block 38 conducting ϑ to the MA block 36. Finally, as in FIG. 1, a block 40 and a block 42 perform the natural logarithm and imaginary, respectively, operations on the symbol stream before generating the estimate of carrier frequency offset ε .

Although the resemblance between MVU and ML estimators may not be as evident as that of MVU and moment estimator, it can be shown that ML estimator can also be classified into the same family. Knowing the fact that $\Im\{\log T_1(x, \vartheta)\} = \angle T_1(x, \vartheta)$ the ML estimator can be expressed as

$$\varepsilon_{ML} = \frac{-1}{2\pi} \Im \left\{ \sum_{k=\alpha}^{\beta} x^*[k]x[k+N] \right\} \quad (41)$$

where the parameters α and β are functions of ϑ_{ML} and can be obtained from the expression for $T_1(x, \vartheta)$, supra. Thus, the ML estimator falls into the same family of estimators. FIG. 2 also displays in tabular form these estimators, their respective summation upper and lower bounds, and their respective averaging intervals. It is noticed that the ML estimator provides the upper and lower bound of the moving average filter (36) by extracting the timing parameter from the likelihood function. Although the ML estimator has the advantage of exploiting the entire bandwidth by removing the requirement for having pilot tones, the symbol timing estimate obtained from the ML estimator has a larger confidence interval. This may result in a considerable performance degradation in comparison to the pilot-based schemes.

Computer simulation is used to assess the performance of the three estimators for synchronization of an OFDM system. The variance of estimator is used as a performance measure through the study. The simulation parameters used are typical of the OFDM and digital audio broadcast (DAB) environments. More specifically, the chosen FFT size (N) for OFDM is 64. Unless otherwise specified, the length of cyclic prefix (L), signal to noise ratio, and frequency offset are set to 8, 20 dB and .01, respectively. Monte Carlo simulation is used to evaluate the performance of the three estimators.

FIG. 3 graphically depicts a comparison between the performance of the ML frequency offset estimator disclosed in the related, copending application with the prior art ML frequency offset estimator given in the van de Beek, et al, reference over the range of timing offset parameter ($\mathcal{Q} \in [1, N + L]$).

FIG. 4 graphically depicts the performance of the MVU frequency offset estimator of the instant invention under complete knowledge of timing offset error. A careful examination of the variances reveals that the gap between MVU estimator and CRLB tends to zero as SNR increases. Also as illustrated in FIG. 4, the departure from CRLB happens rapidly as SNR goes below a threshold. The threshold also depends on the length of CP and is moved toward lower SNRs as L increases. This can be justified in terms of having more observation samples in estimating the unknown parameter. The choice of cyclic prefix length L represents a tradeoff between data rate reduction and performance (lower variance). Increasing L brings the performance of MVU estimator closer to the CRLB, nevertheless, it could result in a considerable data rate reduction due to the redundancy introduced by CP.

FIG. 5 graphically depicts the closed loop performance of the MVU estimator of the instant invention by comparing the frequency offset estimate of the closed loop MVU estimator and the analytical derivation given in equation (28). It is clear that the simulation result very closely resembles the analytical model, thus consolidates the approximate model of the closed loop system.

Numerous variations and modifications will become evident to those skilled in the art once the disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

WHAT IS CLAIMED IS:

1. A method of estimating carrier frequency offset error in a received sample bit stream including an observation vector (OV), having an observed carrier frequency timing offset ϵ , and a plurality of data-symbol frames, having a symbol timing offset error ϑ , comprising the steps of:

generating a probability density function (PDF) based on said OV; and
generating from said PDF an estimate of carrier frequency offset error, $\epsilon_{MVU|\vartheta}$, being a minimum variance unbiased (MVU) estimator.

2. The MVU carrier frequency offset error estimation method of claim 1 wherein said OV comprises an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, and wherein said PDF comprises a first term, p_1 , based on said timing offset ϑ being within the span 1 to N and a second term, p_2 , based on said timing offset ϑ being within the span N+1 to N+L.

3. The MVU carrier frequency offset error estimation method of claim 2 wherein said received bit stream has uncorrelated independent identically distributed random signal and noise sequence variables with power of σ_s^2 and σ_n^2 , respectively, wherein
 5 said OV is denoted \mathbf{x} , and wherein said MVU estimator $\varepsilon_{\text{MVU}|\mathcal{G}}$ is the conditional expectation of a second moment estimator, said second moment estimator given by

$$\tilde{\varepsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \right\}.$$

4. The MVU carrier frequency offset error estimation method of claim 3 wherein
 10 said MVU estimator $\varepsilon_{\text{MVU}|\mathcal{G}}$ is given by

$$\begin{aligned} \tilde{\varepsilon}_{\text{MVU}|\mathcal{G}} &= E \left(\tilde{\varepsilon} \middle| T_1(x, \mathcal{G}) \right) = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\mathcal{G}}^{\mathcal{G}+L-1} x[k]x^*[k+N] \middle| T_1(x, \mathcal{G}) \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(x, \mathcal{G})}{L\sigma_s^2} \right\} \end{aligned}$$

where \Im is the imaginary operator and where

$$T_1(x, \mathcal{G}) = \begin{cases} \sum_{k=\mathcal{G}}^{L+\mathcal{G}-1} x[k]x^*[k+N] & 1 \leq \mathcal{G} \leq N \\ \sum_{k=0}^{\mathcal{G}-N-1} x[k]x^*[k+N] + \sum_{k=\mathcal{G}}^{N+L-1} x[k]x^*[k+N] & N+1 \leq \mathcal{G} \leq N+L \end{cases}.$$

15 5. A method of synchronizing a received sample bit stream, comprising the steps of:

transmitting at a transmitter said bit stream including an observation vector (OV);

receiving and sampling at a receiver said bit stream, said sampled bit stream including, said OV with an observed carrier frequency offset ϵ , and a plurality of data-symbol frames, having a symbol timing offset error θ ;

generating a probability density function (PDF) based on said OV;

5 generating from said PDF an estimate of carrier frequency offset error, $\epsilon_{MVU|\theta}$, being a minimum variance unbiased (MVU) estimator; and

synchronizing said received bit stream by said MVU estimate of carrier frequency offset.

10 6. The synchronization method of claim 5 wherein said OV comprises an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, and wherein said PDF comprises a first term, p1, based on said observed timing offset θ being within the span 1 to N and a second term, p2, based on said observed timing offset θ being within the span N+1 to N+L.

15 7. The synchronization method of claim 6 wherein said received bit stream has uncorrelated independent identically distributed random signal and noise sequence variables with power of σ_s^2 and σ_n^2 , respectively, wherein said OV is denoted x , and wherein said MVU estimator $\epsilon_{MVU|\theta}$ is the conditional expectation of a second moment estimator, said second moment estimator given by

$$\tilde{\epsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\theta}^{\theta+L-1} x[k]x^*[k+N] \right\}.$$

8. The synchronization method of claim 7 wherein said MVU estimator $\epsilon_{\text{MVU}}|_g$ is given by

$$\begin{aligned} \tilde{\epsilon}_{\text{MVU}}|_g &= E\left(\tilde{\epsilon} \middle| T_1(x, g)\right) = \frac{\Im}{2\pi} \ln E\left\{ \frac{1}{L\sigma_s^2} \sum_{k=g}^{g+L-1} x[k]x^*[k+N] \middle| T_1(x, g) \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(x, g)}{L\sigma_s^2} \right\} \end{aligned}$$

5 where \Im is the imaginary operator and

$$\text{where } T_1(x, g) = \begin{cases} \sum_{k=g}^{L+g-1} x[k]x^*[k+N] & 1 \leq g \leq N \\ \sum_{k=0}^{g-N-1} x[k]x^*[k+N] + \sum_{k=g}^{N+L-1} x[k]x^*[k+N] & N+1 \leq g \leq N+L \end{cases}.$$

9. A method of estimating carrier frequency offset error in a received sample bit stream including an observation vector (OV), having an observed carrier frequency
10 timing offset ϵ , and a plurality of data-symbol frames, said OV comprising an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, comprising the steps of:

generating the expected value of the autocorrelation of the k th entry of said OV; and

15 generating from said expected value an estimate of carrier frequency offset error, ϵ_{mom} , being a moment estimator.

10. The moment carrier frequency offset error estimation method of claim 9 wherein said OV is denoted \mathbf{x} , and wherein said moment estimator ϵ_{mom} is given by

$$\hat{\epsilon}_{mom} = \frac{\Im}{2\pi} \left\{ \ln T_3(x) \right\}$$

where the statistic $T_3(x)$ is defined as

$$T_3(x) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N].$$

5 11. A method of synchronizing a received sample bit stream, comprising the steps of:

transmitting at a transmitter said bit stream including an observation vector (OV);

10 receiving and sampling at a receiver said bit stream, said sampled bit stream including, said OV with an observed carrier frequency offset ϵ , and a plurality of data-symbol frames, having a symbol timing offset error ϑ ;

generating the expected value of the autocorrelation of the k th entry of said OV;

15 generating from said expected value an estimate of carrier frequency offset error, ϵ_{mom} , being a moment estimator; and

synchronizing said received bit stream by said moment estimate of carrier frequency offset.

12. The synchronization method of claim 11 wherein said OV is denoted \mathbf{x} , and

20 wherein said moment estimator ϵ_{mom} is given by

$$\hat{\epsilon}_{mom} = \frac{\Im}{2\pi} \left\{ \ln T_3(x) \right\}$$

where the statistic $T_3(x)$ is defined as

$$T_3(x) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N]$$

13. A method of estimating carrier frequency offset error in a received sample bit stream including an observation vector (OV), having an observed carrier frequency timing offset ϵ , and a plurality of data-symbol frames, said OV comprising an L-bit cyclic extension portion and a first and a second N-bit synchronization frame, comprising the steps of:

selecting one estimator method from a group of three: a maximum likelihood (ML) estimator, a minimum variance unbiased (MVU) estimator, a moment estimator, based on said OV; and

generating from said selected estimator an estimate of carrier frequency offset error.

14. The carrier frequency offset error estimation method of claim 13 wherein said MVU estimator method comprises the steps:

generating a probability density function (PDF) based on said OV; and

generating from said PDF an estimate of carrier frequency offset error, $\epsilon_{MVU|s}$, being said MVU estimator.

15. The carrier frequency offset error estimation method of claim 14 wherein said OV comprises an L-bit cyclic extension portion and a first and a second N-bit

synchronization frame, and wherein said PDF comprises a first term, p1, based on said timing offset ϑ being within the span 1 to N and a second term, p2, based on said timing offset ϑ being within the span N+1 to N+L.

16. The carrier frequency offset error estimation method of claim 15 wherein said received bit stream has uncorrelated independent identically distributed random signal and noise sequence variables with power of σ_s^2 and σ_n^2 , respectively, wherein said OV is denoted x , and wherein said MVU estimator $\varepsilon_{\text{MVU}|\vartheta}$ is the conditional expectation of a second moment estimator, said second moment estimator given by

$$\tilde{\varepsilon} = \frac{\Im}{2\pi} \ln \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\vartheta}^{\vartheta+L-1} x[k]x^*[k+N] \right\}.$$

17. The carrier frequency offset error estimation method of claim 16 wherein said MVU estimator $\varepsilon_{\text{MVU}|\vartheta}$ is given by

$$\begin{aligned} \tilde{\varepsilon}_{\text{MVU}|\vartheta} &= E \left(\tilde{\varepsilon} \middle| T_1(x, \vartheta) \right) = \frac{\Im}{2\pi} \ln E \left\{ \frac{1}{L\sigma_s^2} \sum_{k=\vartheta}^{\vartheta+L-1} x[k]x^*[k+N] \middle| T_1(x, \vartheta) \right\} \\ &= \frac{1}{2\pi} \Im \left\{ \ln \frac{T_1(x, \vartheta)}{L\sigma_s^2} \right\} \end{aligned}$$

where \Im is the imaginary operator and where

$$T_1(x, \vartheta) = \begin{cases} \sum_{k=\vartheta}^{L+\vartheta-1} x[k]x^*[k+N] & 1 \leq \vartheta \leq N \\ \sum_{k=0}^{\vartheta-N-1} x[k]x^*[k+N] + \sum_{k=\vartheta}^{N+L-1} x[k]x^*[k+N] & N+1 \leq \vartheta \leq N+L \end{cases}.$$

18. The carrier frequency offset estimation method of claim 13 wherein said moment estimator method comprises the steps:

generating the expected value of the autocorrelation of the k th entry of said OV; and

5 generating from said expected value an estimate of carrier frequency offset error, ϵ_{mom} , being said moment estimator.

19. The carrier frequency offset error estimation method of claim 18 wherein said OV is denoted \mathbf{x} , and wherein said moment estimator ϵ_{mom} is given by

10
$$\hat{\epsilon}_{\text{mom}} = \frac{\Im}{2\pi} \{ \ln T_3(\mathbf{x}) \}$$

where the statistic $T_3(\mathbf{x})$ is defined as

$$T_3(\mathbf{x}) = \frac{1}{L\sigma_s^2} \sum_{k=0}^{N+L+1} x[k]x^*[k+N].$$

ABSTRACT OF THE DISCLOSURE

A class of non data-aided cyclic based robust estimators for frequency offset estimation of multi-carrier systems is disclosed. The use of sufficient statistics provides a minimum variance unbiased (MVU) estimate of the frequency offset under complete knowledge of timing offset error. The Neyman-Fisher factorization theorem and Rao-Blackwell-Lehmann-Scheffe theorem are used to identify the sufficient statistic and appropriate mapping functions. It is shown that there is but one function of the sufficient statistics which results in the minimum variance estimate among the possible class of cyclic-based estimators. Also, a moment estimator of frequency offset is provided to obtain a consistent estimate of carrier offset under uncertain symbol timing error. The moment estimator does not rely on any probabilistic assumptions. Thus, its performance is insensitive to the distribution of the additive noise. A unified structure characterizing both the MVU and moment estimators, as well as a maximum likelihood estimator of a related, copending application is disclosed.

LT1014

CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATORS 13


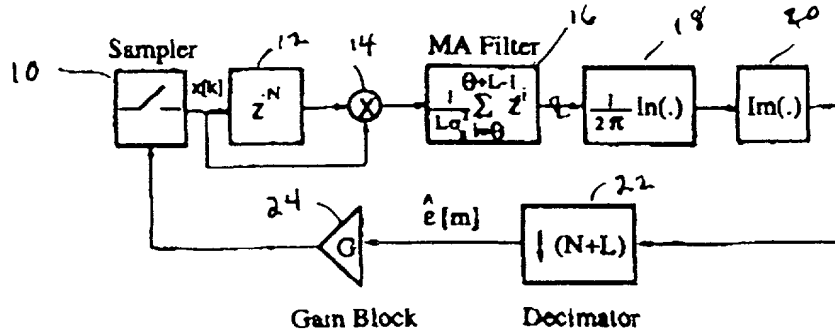


FIG. 1 Closed Loop Offset Estimator

LT1014

CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATORS 18

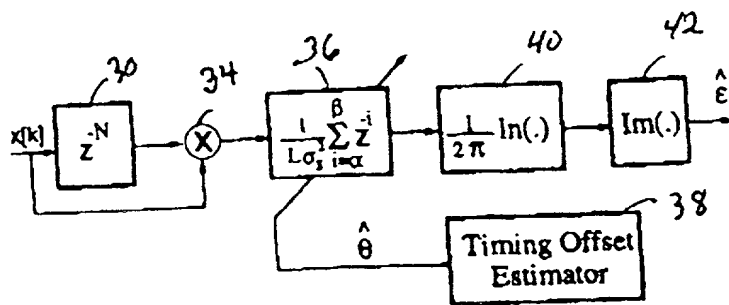

Estimator	α	β
ML	θ_{ML}	$\theta_{ML} + L - 1$
MVU	θ	$\theta + L - 1$
Moment	0	$N + L - 1$

FIG. 2 Unified Structure for Class of Cyclic Bases Estimators

CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATORS 20

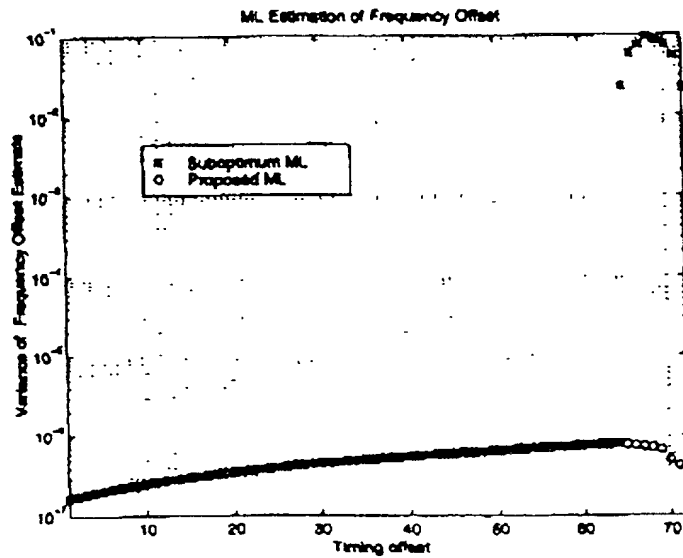


FIG. 3 Comparison Between Proposed and Suboptimum ML Frequency Offset Estimator

CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATORS 21

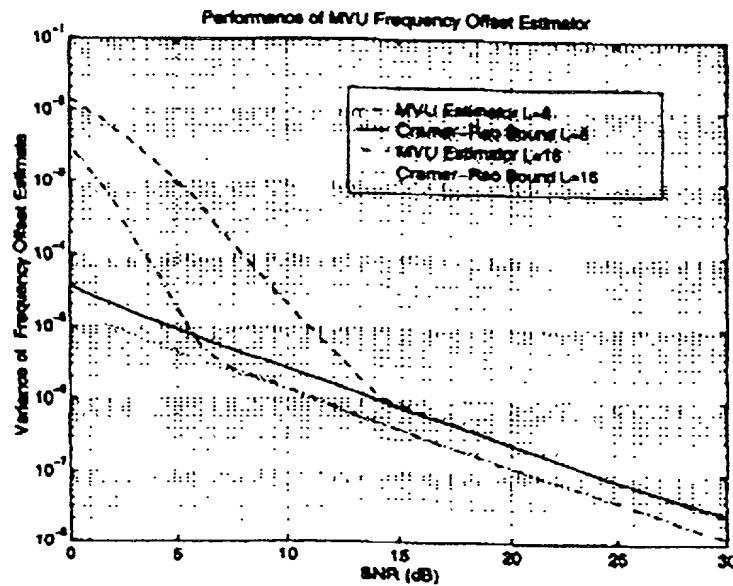


FIG. 4 Performance of MVU Estimator as a Function of SNR

CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATORS 22

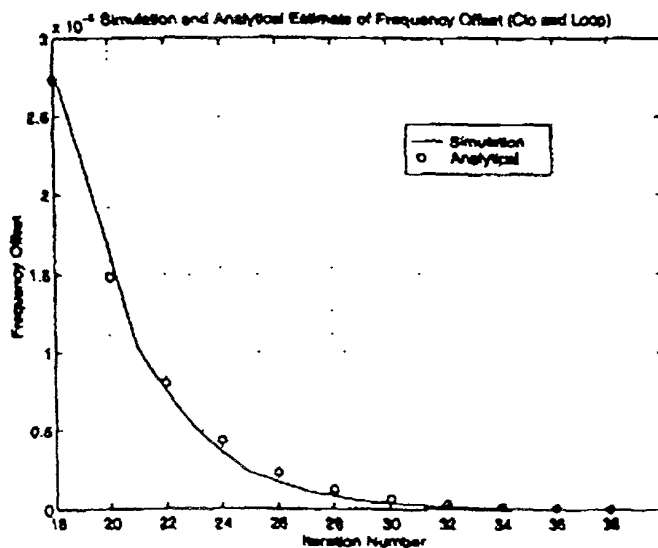


FIG. 5 Closed Loop Performance of MVU estimator

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **CLASS OF CYCLIC BASED ESTIMATORS FOR FREQUENCY OFFSET ESTIMATION OF OFDM SYSTEMS** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Craig J. Cox	(Reg. No. 39643)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. 41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
William S. Francos	(Reg. No. 38456)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Michael B. Johannesen	(Reg. No. 35557)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. 42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. 42201)
John P. Veschi	(Reg. No. 39058)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Jeffrey M. Weinick	(Reg. No. 36304)

(Reg. No. 17765)

Full name of sole inventor (or 1st joint inventor):

signature

Date April, 19, 2000

NAVID LASHKARIAN

Citizenship: Iran

Post Office Address: 43555 Grimmer Blvd, Apt. J286, Fremont, CA 94538

ATTACHMENT A

Reg. No.: 28,231

Reg. No.: 28,231

Phone No.: (831) 685-6100

Phone No.: (831) 685-6100

Fax No.: (831) 685-6105

Fax No.: (831) 685-6105

All written communications are to be addressed to:

Patrick T. King

Law Offices of Patrick T. King

3361 Aptos Rancho Rd.

Aptos, CA 95003